



Oils and Lubricants

It is now more critical than ever to use the recommended oil type, amount and viscosity for a vehicle's compressor type and A/C system. NAPA® Temp and TEMP Select® offer quality oils and lubricants for every application!



R134a Compatible

PAG 46

801651 (8 oz)

409977 (1 qt)

PAG 100

801652 (8 oz)

409975 (1 qt)

PAG 150

801653 (8 oz)

409976 (1 qt)

Ester 100 Lubricant

801650 (8 oz)

409510 (1 qt)

409600 (8 oz) w/ Dye

Hybrid Electric

409610 (8 oz) R134a only

809610 (8 oz) R134a & R1234yf

Vacuum Pump Oil

209508 (1 qt)

R12 Compatible

Mineral Lubricant

209500 (1 qt)

R1234yf Compatible

HFO-1234yf Refrigerant Lubricant

409123 (8 oz TEMP Select)

801234 (8 oz NAPA Temp)

P/N 809610 Polyolester (POE) Oil

When performing an A/C repair, it is imperative to use the correct refrigerant oil. Compatible with both R134a and R1234yf systems, the TEMP Select® POE oil is formulated for its dielectric properties and low flammability to ensure that every job is completed according to OEM specifications. Note that some Honda and Acura vehicles require POE oil instead of traditional PAG. These compressor part numbers will include a label detailing which lubricant should be used. When in doubt, always refer to manufacturer specifications.



P/N 801654 ICE32® P/N 200029 ICE32®yf

ICE32® is a treatment for mobile A/C systems that creates an elasto-hydrodynamic film that adheres to metal surfaces. When professionally installed, ICE32® drastically and instantly improves the A/C system by reducing friction and promoting improved cooling performance. ICE32® is compatible with R134a systems while ICE32®yf is only compatible with mobile A/C systems that use YF refrigerant.



P/N 801513

PAG 46 + ICE32®

P/N 801514

PAG 100 + ICE32®

P/N 801515

PAG 150 + ICE32®

P/N 801520

HFO1234yf + ICE32®yf

TEMP Select® offers four PAG oils with ICE32® included to help increase the efficiency of your system. These oils include 8 oz. of PAG plus 1 oz. of the appropriate ICE32® additive.





Flush

Several quarts of flush are often required to completely flush a system, making it an expensive and labor intensive, but necessary, step in the repair process. It is one of the most important steps after a catastrophic compressor failure. Skipping the flush could void warranty or result in a comeback.

DURA II Flush Solvent

4 Pack P/N 409889P

25 oz P/N 409889; Gallon P/N 419501

- Premium, highly evaporative flush
- Removes all traces of solvent and oil residue
- Requires less evacuation time
- Non-flammable




TEMP Select® Flush Solvent

6 PACK P/N 419955S

25 oz P/N 419955

- Highly effective, economical flush solvent
- Removes debris and contaminates

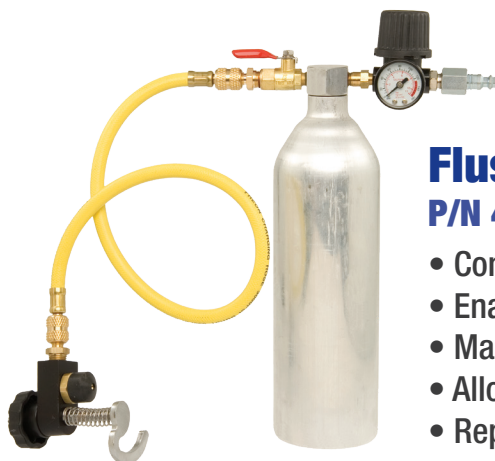

Flush Gun

P/N 419955P

- Complete flush control
- Enables hands-free connection
- Maintains solvent momentum through component
- Allows seamless transition to air-purge
- Replacement flush gun hook available, P/N 219275